




14-2904-01S

SLASHCUT EXHAUST SYSTEM

YAMAHA XV535 VIRAGO
1987-99

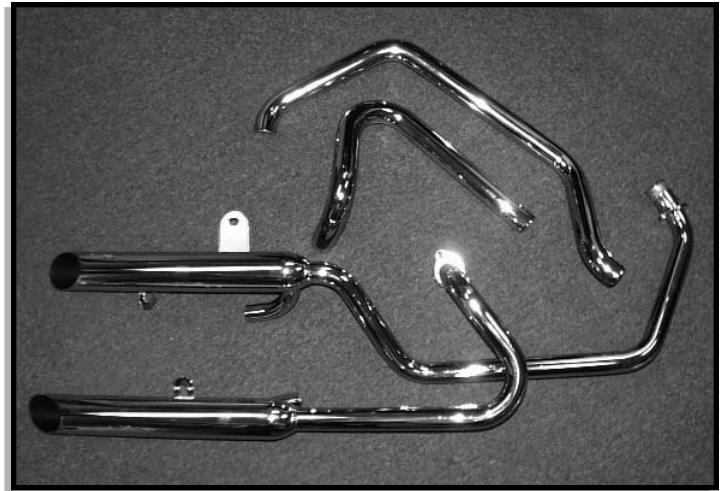

PARTS INCLUDED

- 1 - Front/Top Exhaust Assembly
- 1 - Rear/Bottom Exhaust Assembly
- 2 - Heat Shields
- 1 - 3/8-16x3/4" Hex Head Bolt
- 1 - 3/8" Flat Washer
- 1 - 3/8" Lock Washer
- 8 - Hose Clamps

TOOLS REQUIRED

- Ratchet
- 12mm Socket
- 9/16" Socket
- 6mm Allen Wrench
- 8mm Allen Wrench
- High Temp Silicone Sealant

INSTALLATION INSTRUCTIONS

- 1) Remove the stock exhaust system. Retain the stock hardware.
- 2) Apply a liberal amount of high temperature silicone sealant to the Jardine muffler crossover tubes. Connect the two crossover tubes and loosely mount the two muffler together using the supplied 3/8-16x1" hex head bolt, 3/8" flatwashers, and 3/8-16 hex nut.
- 3) Using the original hardware, mount the Jardine exhaust pipes to the front and rear cylinders. Do not fully tighten at this time.
- 4) Using the original hardware, mount the top muffler to the motorcycle frame. Do not fully tighten at this time.
- 5) Adjust the system as needed for the best possible fit and fully tighten all hardware. Clean all fingerprints and grease off of the exhaust system. After the silicone sealant has adequate time to dry, start the motorcycle and check for any exhaust leaks.
- 6) Using the provided hose clamps attach the full length heat shields to the headpipes. Clean all grease and fingerprints off of the heat shields.

NOTE: Rejetting or remapping may be required due to the increased flow of the Jardine exhaust.